



Victor

Road and street lantern combining advanced performance with a modern and timeless styling

- IP66 sluiting zorgt voor lange levensduur en goede prestaties van de componenten
- Aangepast voor snel onderhoud en installatie met draaislotluis voor snelle toegang tot de onderdelen
- Keuze uit bevestigingen voor paaltop-, laterale of draagkabelmontage



Bij de foto's, tekeningen en lichttechnische gegevens gaat het louter om symbolische beelden. Voor preciezere productgegevens moet u een product uitkiezen.

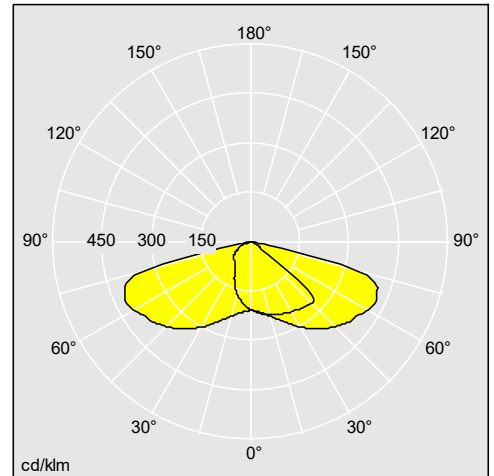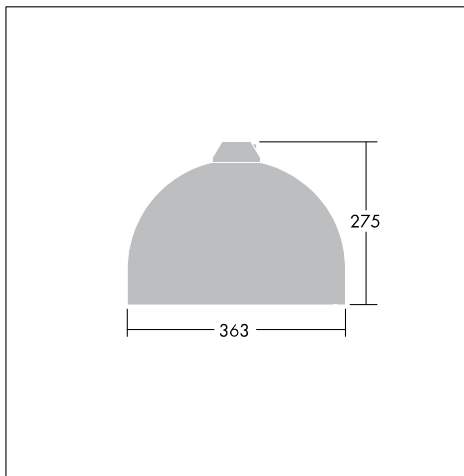

96221878

Materialen en Afwerking

Body: aluminium powder coated NCS0500 (White)

Spigot: corrosion protected steel

Enclosure: 4mm clear toughened glass

Screws and clips: stainless steel

(EN AC-44300).

Standard corrosion class C5 according to ISO 9223: 2012.

Installatie en Montage

Mounting spigot of female 3/4" pipe thread type (for Ø27G male threaded tube). Large choice of fixings for post-top, side entry or catenary (see Columns section of the catalogue). Cable gland for Ø6mm to Ø13mm cable. Access from below to gear and optic system after quick release of the hinged glass enclosure via 'twist and lock' design. Automatic disconnection of the electrical mains when opening. Mounting plate with optics and control gear has hinge suspension and stays attached when released. Tool free connection to 2x2.5mm² terminal. Complete with wired 8m (W8) or 10m (W10) cable.